

Terberg KingLifter BV manufactures truck-mounted forklifts in a wide range of different models under the name KingLifter. The feature of these high quality machines is that all models boast an exceptionally good lifting capacity-low unladen weight ratio. Professional users will certainly appreciate how valuable this feature is.

The KingLifter S is the most compact machine in the Terberg KingLifter range. This Terberg KingLifter really comes into its own when restricted dimensions and a low unladen weight are key considerations.

Powerful for its size, the machine comes in several models. As standard, the machine features a 27 hp diesel engine, 1-wheel or 3-wheel drive, masts with a lifting capacity of 1,500 kg and a lifting height of 1,800 to 2,800 mm, fixed or retractable legs, a range of fork and wheel variants and many extra options.

In short, there is a Terberg KingLifter S model to suit your own specific application needs.

It is important for your company's image that a truck-mounted forklift retains its good looks. This also comes into play as far as residual value is concerned. Consequently, Terberg devoted particular attention to optimum anti-corrosion protection.

The frame, the lifting mast and other steel sections are finished with a CDP base layer and powder coating. The plating is made of stainless steel. The legs which are always susceptible to damage in use are hot-dip galvanised.

All models are equipped with work lights, beacon lamp, parking brake and power steering.



MODEL TKL-S

TECHNICAL INFORMATION



The driver is seated completely within the contours of the machine to ensure operating safety.



Model TKL-S

Area of application:

- Distributing beverages
- Agricultural sector and turf
- Building materials, e.g. transporting insulation materials
- Gas industry
- Carpet transport

The engine compartment is easily accessible thanks to the large revolving door. This makes it a lot easier to perform an oil level check and carry out service work.




Duplo Glide mast with Reach fork

- CDP base layer and powder coating
- Lifting capacity of 1,500 kg
- Lifting height of 1,800 to 2,800 mm



Distributing beverages

- Extra side-shift fork carriage
- Load backrest on fork carriage
- Crate support

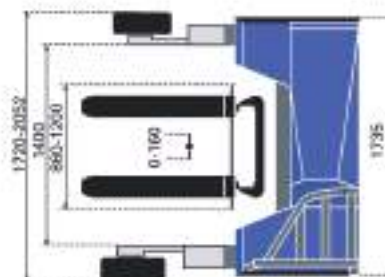

| | TKL-S | |
|----------------------|---------------------|---------------------|
| | 1x3 | 3x3 |
| lifting mast | DGR | DGR |
| engine | 19.9 kW (27.1 hp) | 19.9 kW (27.1 hp) |
| drive | 1 wheel | 3 wheel |
| lifting capacity | 1,500 kg @ 600mm LC | 1,500 kg @ 600mm LC |
| standard front wheel | 140/55 | 18x7-8 |
| standard rear wheel | 23x8.5-12 | 23x8.5-12 |
| unladen weight* | 1,280 kg | 1,480 kg |

* varies according to machine specification



Terberg KingLifter B.V. | Baronieweg 23a | 3403 NL IJsselstein | The Netherlands
 Tel.: +31 (0)30 2219070 | Fax: +31 (0)30 2219071 | Email: info@terbergkinglifter.eu

Specifications and illustrations are subject to change; no liability may be derived from the illustration and specification above.
 The specifications may be amended without prior notice.